




# Product Specification

<b>Product Family</b>	: Hodge Podge Games+Sports
<b>Product name</b>	: VIP Swing
<b>Item number</b>	: 97.100.026
<b>Children's age</b>	: 5+
<b>Fall Height (EN1176)</b>	: 2.2 m (7'-3'' )
<b>Dimensions: length, width, height</b>	: 4.7 x 2.0 x 3.5 m (15'-4'' x 6'-7'' x 11'-6'' )
<b>Protective Surfacing Area required (EN1176)</b>	: 7.7 x 9.2 m
<b>Protective Surfacing Area required (ASTM 1487)</b>	: 8.4 x 9.8 m (27'-5'' x 32'-2'' )
<b>Minimum space required</b>	: <b>EN1176:</b> 53.6 m <sup>2</sup> / <b>ASTM 1487:</b> 62.6 m <sup>2</sup>
<b>Number of foundations</b>	: 2
<b>Concrete Volume C20/25 (3.000 psi)</b>	: 1.4 m <sup>3</sup>
<b>Number of skilled installers required</b>	: 2
<b>Installation time without foundation</b>	: 3 hours
<b>Dimensions of largest part</b>	: Ø 0.14 x 4.5 m (5 ½" x 14'-9" )
<b>Weight of heaviest part</b>	: 175 kg
<b>Freight volume</b>	: 0.7 m <sup>3</sup>
<b>Gross weight</b>	: 290 kg
<b>Spare part guarantee</b>	: Lifelong
<b>Certificate according to EN 1176</b>	: No.: Z2 05 10 10256 042 – TÜV Product Service

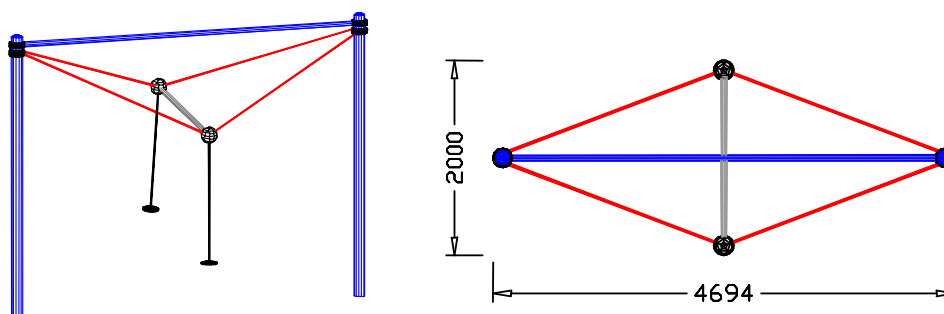

Teetering partner swing with two pendulum seats suspended from rubber-coated chains which are connected to a steel pipe (60.3mm (2 3/8'')) with an aluminium ball attached to either end. The steel pipe and seat combination is suspended from ropes which are connected to a steel frame which is constructed from two upright steel posts (133mm (5 1/4'')) and one horizontal steel pipe (60.3mm (2 3/8'')). Cast aluminium clamps connect the steel posts together. Connections between the ropes and the posts are pivoted.

<b>Steel posts Jan:</b>	Steel pipes Ø 133 mm (5 1/4'') with rounded cast aluminum post top, minimum wall thickness 7,1mm (1/4''); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.
<b>Terranos clamps:</b>	Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos steel posts.
<b>Ropes:</b>	U-Rope-round strand ropes with steel cores, Ø 16mm (5/8'') – unless otherwise noted ; with galvanized wires, external strands covered; with non-abrasive UV-resistant Polyamide-yarn (no Polypropylene!).
<b>Steel pipe:</b>	1 <b>Framework</b> -steel pipe, Ø 60.3 mm (2 3/8''); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.
<b>Nodes:</b>	2 <b>Framework</b> -aluminum ball connectors, Ø 250mm (9-13/16''); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process; securely closed with durable ebonite caps.



# Product Specification